

suntree
human technology nature

PV SURGE PROTECTOR

The handle connecting rod material you can choose stainless steel, or plastic materials

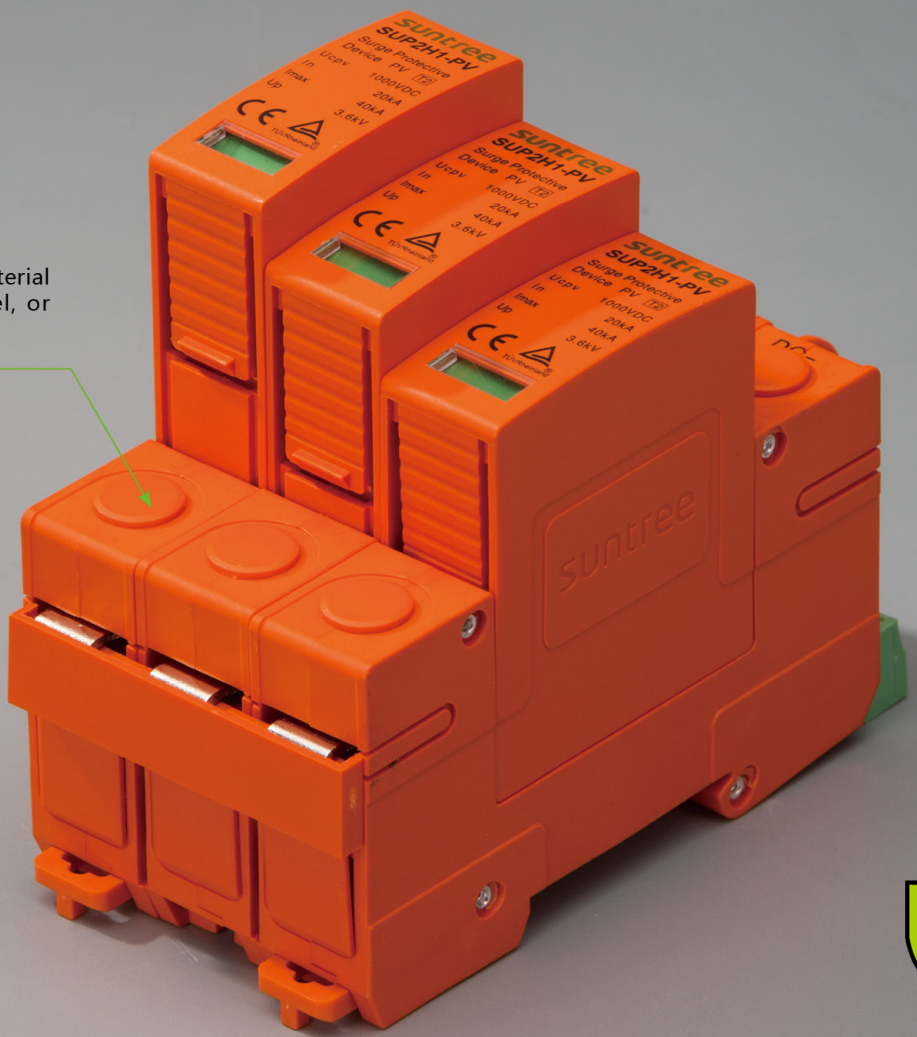



5 YEAR WARRANTY


Lightning and surge protection for PV systems installed on buildings

Please take the following measures to protect the PV system from damage of lightning impulse or surge voltage:

- All metal parts (such as framework, support, etc) of PV system must be connected to the main equipotential bus to ensure reliable equipotential connection of the whole system.
- Must keep a safe distance (S) between all parts of PV systems and the external lightning protection system. The external lightning protection system can be connected to the main equipotential bus, fundamental earth screen or ground ring only.
- Adoption of twisted–pair wiring to reduce system jamming.
- For cables from outdoors, the surge protection device should be installed at the entrance of buildings. An all–round and systematic lightning protection should also protect other facilities on buildings from being damaged.


Reasonable wiring:

adoption of twisted–pair wiring with lines as short as possible, to avoid big loop and reduce induced voltage on circuits.



Surge protection device installed on the DC side:

for cables from outdoors, the surge protection device should be installed at the entrance of buildings.




safe distance (S):

must keep a safe distance between all parts of PV systems and the external lightning protection system.

PV modules installed in the lightning protection zone:

all solar panels must be installed in the lightning protection zone OB to protect equipment from direct lightning strike. (Refer to IEC 61643–31 lightning protection zone)

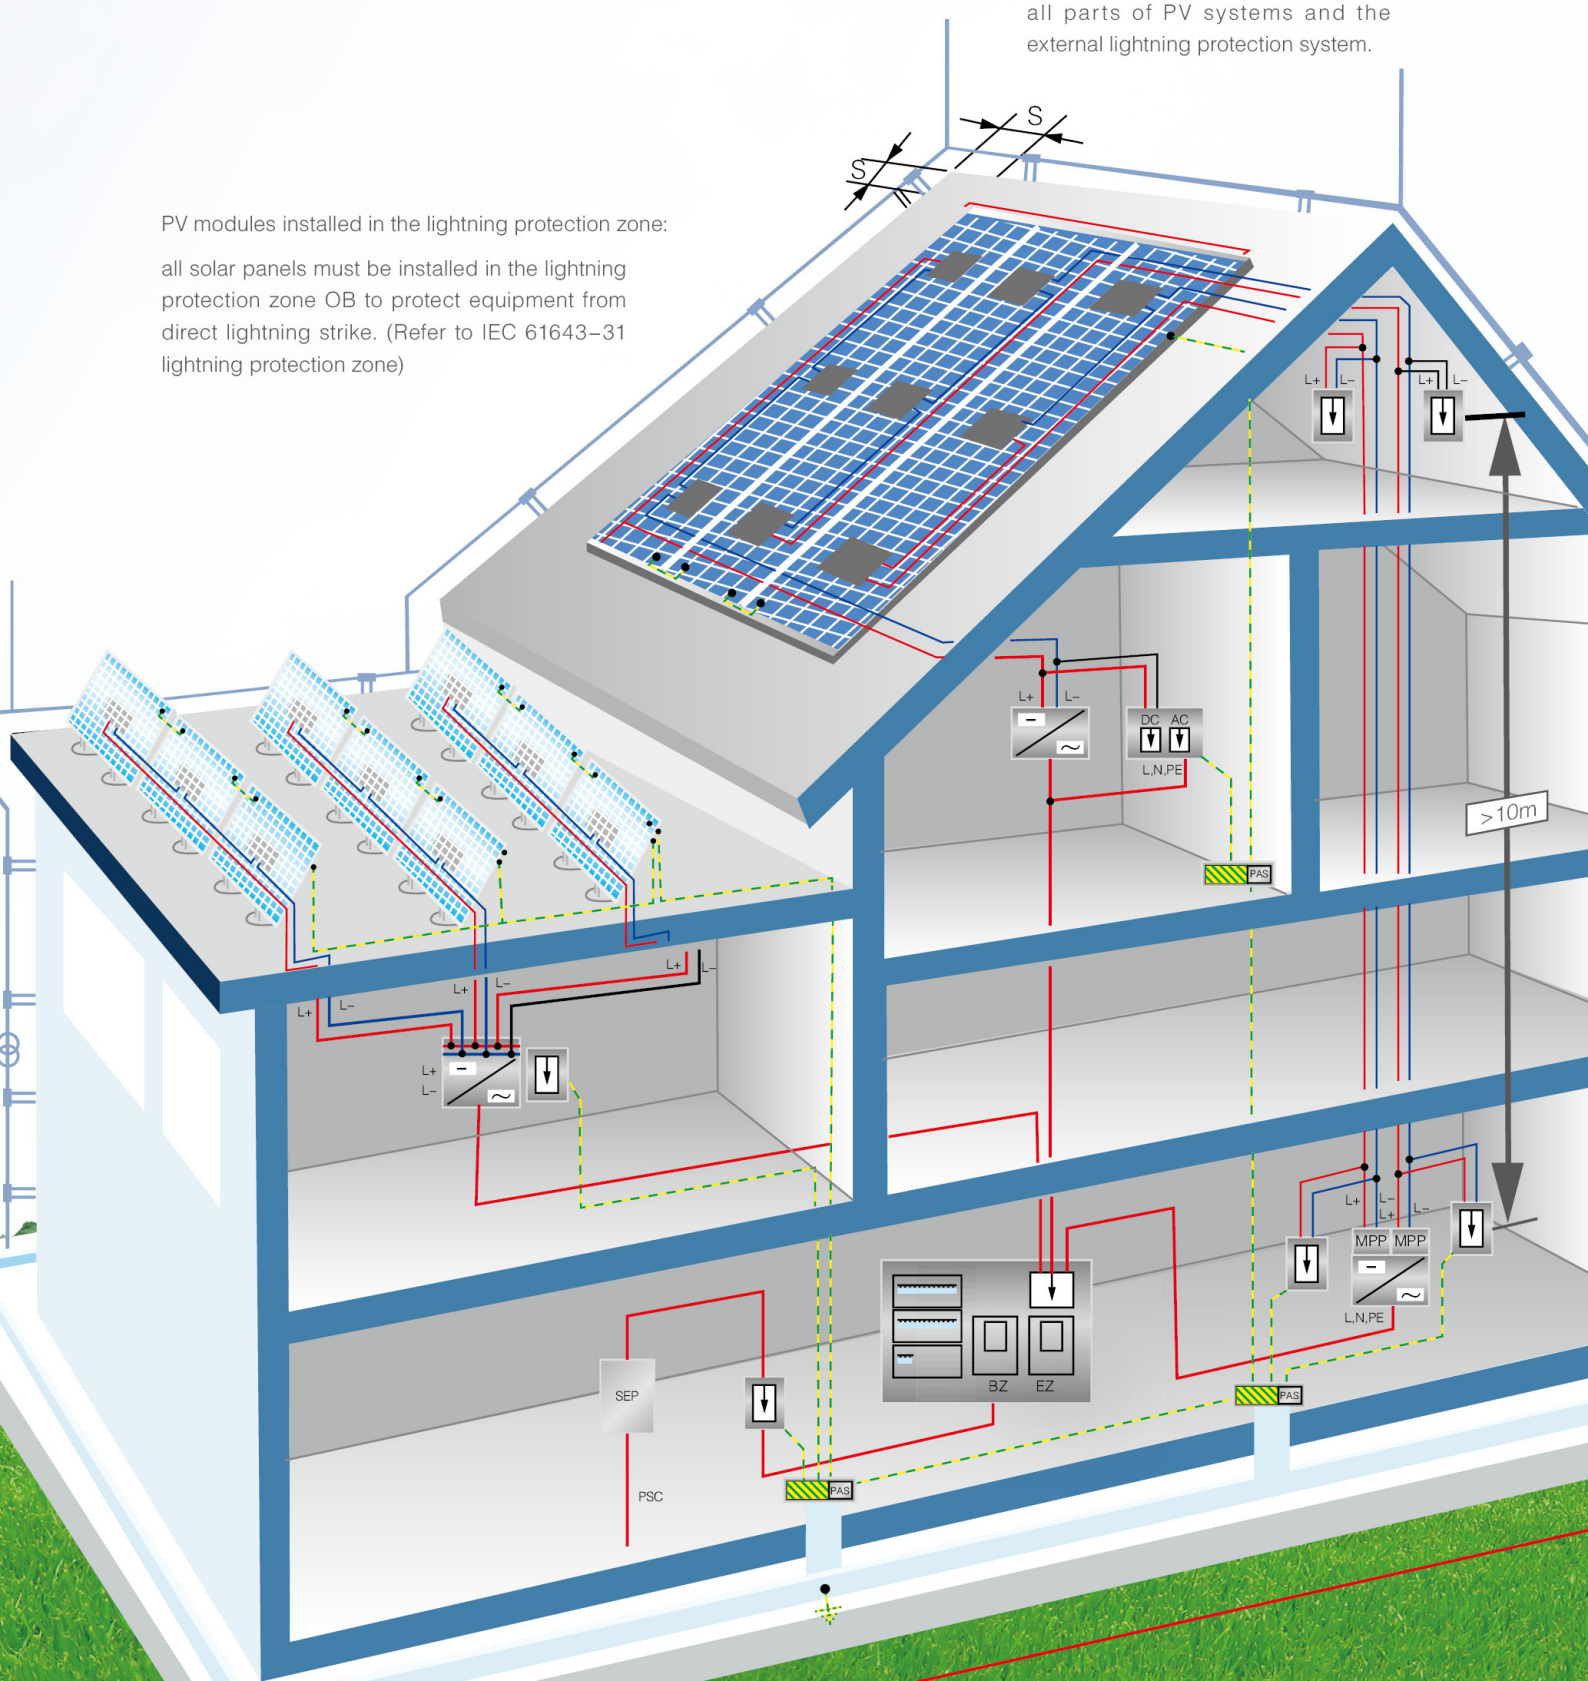



SUP2H-PV Series Surge Protector

SUP2H–PV surge protective device, protect against lightning surge voltages in solar system (photovoltaic power supply system).
These units must be installed in parallel on the DC networks to be protected and provide common and different modes protection. Its installed location are recommended at both ends of the DC power supply line (solar panel side and inverter/converter side), ely if the line routing is external and long.
High energy MOVs equipped with specific thermal disconnectors and related failure indicators.

CE TÜV ROHS

Specifications

SUP2H-PV series surge protector		SUP2H-PV		
PV DC-specific (LEC 66143-1/EN 61643-31)				
Pole		2P	2P	2P
Electrical Parameter				
Classified test		II	II	II
UCPV(V DC)		500	600	800
In(8/20)us (kA)		20	20	20
Imax(8/20)us (kA)		40	40	40
Up (kV)		2.8	2.8	3.0
Remote control and indication				
Indication window				
Plug-in Module				
Remote signal contact				
Remote signal contact	maximum working voltage(V)	250 AC/30V DC	250 AC/30V DC	250AC/30V DC
	maximum working current (A) 1A(250V/ AC)	1A(250V/ AC)	1A(250V/ AC)	1A(250V/ AC)
	1A (30V DC)	1A(30V/ AC)	1A(30V/ AC)	1A(30V/ AC)
Wiring & installation				
Wiring capacity(mm²)	Hard wire	4~25	4~25	4~25
	Flexible wire	4~16	4~16	4~16
Stripping length(mm)		10	10	10
Terminal screwa		M5	M5	M5
Torque(Nm)	Main ciruit	3.5	3.5	3.5
	Remote signal contact	0.25	0.25	0.25
Protection class	All profile	IP40	IP40	IP40
	Connection port	IP20	IP20	IP20
Installation environment		No obvious shock and vibration		
Altitude (m)		≤2000	≤2000	≤2000
Working Temperature		-3.0~+70	-3.0~+70	-3.0~+70
Relative humidity		30%~90%	30%~90%	30%~90%
How to Install		Installed with H35-7.5/DIN35 steel mounting rail		
Size(mm)(WxHxL)	W	36	36	36
	H	90	90	90
	L	70	70	70
Weight (kg)		0.24	0.24	0.24

Specifications

SUP2-PV series surge protector		SUP2-PV				
PV DC-Specific(IEC 66143-1/EN 61643-11)						
Pole		2P	2P	2P	2P	2P
Electrical Parameter						
Classified Test		II	II		II	II
Un(V DC)		48	110	150	220	360
Uc(V DC)		65	150	200	300	500
In(8/20us(kA)		20	20	20	20	20
Imax(8/20us(kA)		40	40	40	40	40
Up(kV)		≤0.8	≤1.0	≤1.6	≤2.0	≤2.6
Remote Control and indication						
Indication Window						
Plug-in module						
Remote signal contact						
Remote signal contact	maximum working voltage(V)	250 AC/30V DC	250 AC/30V DC	250 AC/30V DC	250 AC/30V DC	250 AC/30V DC
	maximum working current(A) 1A(250V/AC)	1A(250V/AC)	1A(250V/AC)	1A(250V/AC)	1A(250V/AC)	1A(250V/AC)
	1A(30V DC)	1A(30V DC)	1A(30V DC)	1A(30V DC)	1A(30V DC)	1A(30V DC)
Wiring & Installation						
Wiring capacity	Hard Wire	4~25	4~25	4~25	4~25	4~25
	Flexible Wire	4~16	4~16	4~16	4~16	4~16
Stripping length		10	10	10	10	10
Terminal screw		M5	M5	M5	M5	M5
Torque(Nm)	Main Circuit	3.5	3.5	3.5	3.5	3.5
	Remote signal contact	0.25	0.25	0.25	0.25	0.25
Protection class	All profile	IP40	IP40	IP40	IP40	IP40
	Connection port	IP20	IP20	IP20	IP20	IP20
Installation environment		No obvious shock and vibration				
Altitude(m)		≤2000	≤2000	≤2000	≤2000	≤2000
Working Temperature		-40°C～+80°C	-40°C～+80°C	-40°C～+80°C	-40°C～+80°C	-40°C～+80°C
Relative humidity		30%~90%	30%~90%	30%~90%	30%~90%	30%~90%
How to Install		Installed with H35-7.5/DIN35 stell mounting rail				
Size(mm)(W×H×L)	W	36	36	36	36	36
	H	90	90	90	90	90
	L	67.6	67.6	67.6	67.6	67.6
Weight(kg)		0.24	0.24	0.24	0.24	0.24